

# EXAIR®

MANUFACTURING INTELLIGENT COMPRESSED AIR PRODUCTS SINCE 1983



**COAT**



**CLEAN**



**CAUTION  
COOL**



**CONVEY**



**CONSERVE**

**32  
CATALOG**



**NEW** Soft Grip Super Air Scraper™ .... pg. 103

**NEW** Hazardous Location Cabinet Cooler® Systems..... pg. 199

YOU REQUESTED THIS CATALOG AND PRICE LIST.  
PLEASE SEE MAILING LABEL ON BACK COVER.



Stay up to date by visiting our website and take advantage of the information and services we didn't have room to display in this catalog.

# EXAIR.com®

The digital home of Intelligent Compressed Air® products for industry



## Where you can

- **Chat live** with our problem solving, technical expert Application Engineers
- **Watch product videos** to learn more about the features and benefits of our engineered products
- Quickly **order online** with a purchase order or credit card (US & Canada)
- **Access product presentation slides** you can use to educate others
- **Find International Distributors** all across the world



## Access our Knowledge Base to

- **Download 3D models** and CAD drawings in multiple formats to place into your drawings
- **Calculate air savings and ROI** to see how quickly EXAIR products will pay off
- Search our **Case Study Library & Applications database** and become familiar with how our products solve problems
- **Use our product FAQ's** for quick access to our most common questions
- Learn about our free **Efficiency Lab** service and use it to **determine air and money savings** you can achieve when installing EXAIR engineered solutions
- Collect compressed air data and pipe sizing recommendations
- **Find** Flow, Force and Heat conversions



## Visit our PDF library and download

- Electronic files of **the entire catalog** or individual sections
- **Installation and Maintenance Guides** on every EXAIR product
- Our current **price list** to have all product prices in one convenient location
- EXAIR's **Air Nozzle Blowoff Guide** to see the details on our enormous selection of sizes, materials and performance options



## Follow our blog for 5 new entries a week and learn

- Details and installations of widely varied applications
- The methodology and results of critical mathematical formulas which help determine money savings, air savings, performance benefits and more
- New product releases before they reach our catalog or website
- More about EXAIR, our team and community involvement
- **Go to** [blog.exair.com](http://blog.exair.com)

## Make social connections

- Watch **over 90 videos** on EXAIR's YouTube Channel and see product features and benefits, applications, Tips & Tricks, How-to, our team members, or be entertained by Professor Penurious!
- **Follow our Company on Twitter @EXAIR** or our Application Engineers and learn more about promotions, updates on manufacturing, engineering and international industry perspective.



@EXAIR\_BB



@EXAIR\_BF



@EXAIR\_JB



@EXAIR\_JS



@EXAIR\_NR



@EXAIR\_RB



@EXAIR\_SH



@EXAIR\_TD

- **Connect with us on Facebook** at [facebook.com/exair](http://facebook.com/exair) or follow us on Google+



**Not on a PC? Our website is mobile friendly**

|                            |     |
|----------------------------|-----|
| Terms and Conditions ..... | 4   |
| Efficiency Lab .....       | 5   |
| Standards Compliance ..... | 208 |

# 6



## EXAIR Optimization

|                                                             |    |
|-------------------------------------------------------------|----|
| Minimize compressed air use and detect wasteful leaks ..... |    |
| 6 Steps to Optimization .....                               | 6  |
| Electronic Flow Control .....                               | 7  |
| Digital Flowmeter with wireless capability .....            | 10 |
| Digital Flowmeter .....                                     | 12 |
| Digital Sound Level Meter .....                             | 15 |
| Ultrasonic Leak Detector .....                              | 16 |

# 18



## Air Knives

Blowoff, clean, dry and cool with less noise and air consumption

|                                           |    |
|-------------------------------------------|----|
| Super Air Knife .....                     | 18 |
| Compare Blowoffs .....                    | 21 |
| Explanation of Materials .....            | 24 |
| Universal Air Knife Mounting System ..... | 27 |
| Plumbing Kits .....                       | 27 |
| Standard Air Knife .....                  | 31 |
| Full-Flow Air Knife .....                 | 34 |

# 36



## Air Wipes

Blowoff, dry, clean and cool pipe, cable, extruded shapes and hose

|                          |    |
|--------------------------|----|
| Super Air Wipes .....    | 36 |
| Standard Air Wipes ..... | 40 |

# 42



## Air Amplifiers

Vent, exhaust, cool, dry and clean - with no moving parts

|                                 |    |
|---------------------------------|----|
| Super Air Amplifiers .....      | 44 |
| Adjustable Air Amplifiers ..... | 48 |

# 50



## Air Nozzles and Jets

Reduce noise levels and air costs on blowoff operations

|                                              |    |
|----------------------------------------------|----|
| Air Nozzles .....                            | 50 |
| Air Nozzle Comparison Chart .....            | 52 |
| Super Air Nozzles .....                      | 53 |
| Flat Super Air Nozzles .....                 | 55 |
| Super Air Scraper .....                      | 55 |
| Back Blow Air Nozzles .....                  | 57 |
| Safety Air Nozzles .....                     | 58 |
| Air Jets .....                               | 59 |
| High Force Air Nozzles .....                 | 61 |
| High Force Air Nozzle Comparison Chart ..... | 61 |
| High Force Flat Super Air Nozzles .....      | 61 |
| High Force Super Air Nozzles .....           | 62 |
| Super Air Nozzle Clusters .....              | 65 |
| Stay Set Hoses .....                         | 65 |
| Swivel Fittings .....                        | 66 |
| Blowoff Systems .....                        | 67 |

# 68



## Atomizing Nozzles

All stainless steel construction for durability and corrosion resistance

|                                                            |    |
|------------------------------------------------------------|----|
| 1/8 NPT Atomizing Nozzles .....                            | 69 |
| Internal Mix Narrow Angle Round Atomizing Nozzles .....    | 69 |
| Internal Mix Wide Angle Round Atomizing Nozzles .....      | 70 |
| Internal Mix Flat Fan Atomizing Nozzles .....              | 71 |
| External Mix Narrow Angle Flat Fan Atomizing Nozzles ..... | 72 |
| Siphon Fed Round Atomizing Nozzles .....                   | 73 |
| Siphon Fed Flat Fan Atomizing Nozzles .....                | 74 |
| 1/4 NPT Atomizing Nozzles .....                            | 75 |
| Internal Mix Narrow Angle Round Atomizing Nozzles .....    | 75 |
| Internal Mix Wide Angle Round Atomizing Nozzles .....      | 76 |
| Internal Mix Flat Fan Atomizing Nozzles .....              | 77 |
| Internal Mix Deflected Flat Fan Atomizing Nozzles .....    | 78 |
| Internal Mix 360° Hollow Circular Atomizing Nozzles .....  | 78 |
| External Mix Round Atomizing Nozzles .....                 | 79 |
| External Mix Narrow Angle Flat Fan Atomizing Nozzles ..... | 80 |
| External Mix Wide Angle Flat Fan Atomizing Nozzles .....   | 81 |

## Atomizing Nozzles continued

|                                                            |    |
|------------------------------------------------------------|----|
| Siphon Fed Round Atomizing Nozzles .....                   | 82 |
| Siphon Fed Flat Fan Atomizing Nozzles .....                | 83 |
| 1/2 NPT Atomizing Nozzles .....                            | 84 |
| Internal Mix Narrow Angle Round Atomizing Nozzles .....    | 84 |
| Internal Mix Wide Angle Round Atomizing Nozzles .....      | 85 |
| Internal Mix Flat Fan Atomizing Nozzles .....              | 86 |
| Internal Mix 360° Hollow Circular Atomizing Nozzles .....  | 87 |
| External Mix Narrow Angle Flat Fan Atomizing Nozzles ..... | 88 |
| Siphon Fed Round Atomizing Nozzles .....                   | 89 |

# 90



## No Drip Atomizing Nozzles

Eliminate drips to conserve valuable liquids and improve product finishes.

|                                                                    |    |
|--------------------------------------------------------------------|----|
| 1/8 NPT No Drip Atomizing Nozzles .....                            | 91 |
| No Drip Internal Mix Narrow Angle Round Atomizing Nozzles .....    | 91 |
| No Drip Internal Mix Wide Angle Round Atomizing Nozzles .....      | 91 |
| No Drip Internal Mix Flat Fan Atomizing Nozzles .....              | 92 |
| No Drip External Mix Narrow Angle Flat Fan Atomizing Nozzles ..... | 93 |
| No Drip Siphon Fed Round Atomizing Nozzles .....                   | 94 |
| No Drip Siphon Fed Flat Fan Atomizing Nozzles .....                | 94 |
| 1/4 NPT No Drip Atomizing Nozzles .....                            | 91 |
| No Drip Internal Mix Narrow Angle Round Atomizing Nozzles .....    | 91 |
| No Drip Internal Mix Wide Angle Round Atomizing Nozzles .....      | 91 |
| No Drip Internal Mix Flat Fan Atomizing Nozzles .....              | 92 |
| No Drip External Mix Deflected Flat Fan Atomizing Nozzles .....    | 92 |
| No Drip Internal Mix 360° Hollow Circular Atomizing Nozzles .....  | 92 |
| No Drip External Mix Round Atomizing Nozzles .....                 | 93 |
| No Drip External Mix Narrow Angle Flat Fan Atomizing Nozzle .....  | 93 |
| No Drip Internal Mix Wide Angle Flat Fan Atomizing Nozzle .....    | 93 |
| No Drip Siphon Fed Round Atomizing Nozzles .....                   | 94 |
| No Drip Siphon Fed Flat Fan Atomizing Nozzles .....                | 94 |
| 1/2 NPT No Drip Atomizing Nozzles .....                            | 91 |
| No Drip Internal Mix Narrow Angle Round Atomizing Nozzles .....    | 91 |
| No Drip Internal Mix Wide Angle Round Atomizing Nozzles .....      | 91 |
| No Drip Internal Mix Flat Fan Atomizing Nozzles .....              | 92 |
| No Drip External Mix 360° Hollow Circular Atomizing Nozzles .....  | 92 |
| No Drip Internal Mix Narrow Angle Flat Fan Atomizing Nozzles ..... | 93 |
| No Drip Siphon Fed Round Atomizing Nozzles .....                   | 94 |
| Droplet Size/Spray Angle Information .....                         | 95 |

## 96

### Safety Air Guns

Safety air guns use engineered air nozzles for high performance

|                                                |     |
|------------------------------------------------|-----|
| Chip Shields                                   | 97  |
| VariBlast <sup>®</sup> Compact Safety Air Guns | 98  |
| Soft Grip Safety Air Guns                      | 100 |
| Super Air Scraper                              | 103 |
| Heavy Duty Safety Air Guns                     | 104 |
| Back Blow Safety Air Guns                      | 105 |
| Super Blast Safety Air Guns                    | 106 |

## 108

### Gen4 Static Eliminators

Eliminate static electricity, dust and shock hazard

|                                                     |     |
|-----------------------------------------------------|-----|
| Gen4 <sup>®</sup> Super Ion Air Knife               | 110 |
| Static Meter                                        | 112 |
| Gen4 <sup>®</sup> Standard Ion Air Knife            | 116 |
| Gen4 <sup>®</sup> Ionizing Bars                     | 118 |
| Gen4 <sup>®</sup> Super Ion Air Wipes               | 120 |
| Gen4 <sup>®</sup> Ion Air Cannon                    | 122 |
| Gen4 <sup>®</sup> Ion Air Gun                       | 124 |
| Gen4 <sup>®</sup> Ion Jet/Gen4 Stay Set Ion Air Jet | 126 |
| Gen4 <sup>®</sup> Ionizing Point                    | 128 |
| Gen4 <sup>®</sup> Power Supplies                    | 129 |

## 130

### E-Vac<sup>®</sup> Vacuum Generators

Vacuums for lifting, clamping, mounting and placement

|                              |     |
|------------------------------|-----|
| How to Build an E-Vac System | 131 |
| In-Line                      | 132 |
| Adjustable                   | 135 |
| Vacuum Cups                  | 137 |

## 141

### Air Operated Conveyors

Convey parts, materials and waste - with no moving parts

|                          |     |
|--------------------------|-----|
| Line Vac                 | 141 |
| Threaded Line Vac        | 147 |
| Heavy Duty Line Vac      | 150 |
| Sanitary Flange Line Vac | 152 |
| Light Duty Line Vac      | 154 |

## 156

### Industrial Housekeeping

Reliable vacuums for chip removal, liquid transfer and cleaning

|                               |     |
|-------------------------------|-----|
| Reversible Drum Vac           | 156 |
| High Lift Reversible Drum Vac | 158 |
| Chip Trapper                  | 160 |
| High Lift Chip Trapper        | 162 |
| Chip Vac                      | 164 |
| Heavy Duty Dry Vac            | 166 |
| Heavy Duty HEPA Vac           | 168 |
| Vac-u-Gun                     | 170 |

## 172

### Vortex Tubes & Spot Cooling

Cold air for industrial spot cooling problems

|                        |     |
|------------------------|-----|
| Vortex Tubes           | 172 |
| Adjustable Spot Cooler | 180 |
| Mini Cooler            | 183 |

## 184

### Cold Gun Aircoolant Systems

Cool machining operations with clean, cold air

## 188

### Cabinet Cooler<sup>®</sup> Systems

Cool and purge NEMA 12, 4 and 4X electrical control panels

|                                    |     |
|------------------------------------|-----|
| How it Works                       | 189 |
| Selecting the Right Model          | 189 |
| Special Duty Cabinet Coolers       | 190 |
| Calculating Heat Load              | 192 |
| Cabinet Cooler Sizing Guide        | 193 |
| NEMA 12 Models                     | 195 |
| NEMA 4 Models                      | 196 |
| NEMA 4X Models                     | 197 |
| Cabinet Cooler System Accessories  | 198 |
| Hazardous Location Cabinet Coolers | 199 |

## 201

### Accessories

Mufflers, filters, regulators, valves, swivel fittings and more

|                                  |     |
|----------------------------------|-----|
| Filters                          | 201 |
| Regulators                       | 202 |
| Silencing Mufflers               | 203 |
| Valves, Swivels, Thermostats     | 205 |
| Magnetic Bases, Stay Sets, Hoses | 206 |
| Air Hoses                        | 206 |
| Fittings                         | 207 |
| Receiver Tank                    | 207 |



Catalog item orders received before 3 pm EDT/ EST are generally shipped from Cincinnati, Ohio on the same day. You can expect delivery within 1-4 days depending on your location.

# Terms and Conditions (U.S. and Canada Only)

**Terms:** Net 30 days upon credit approval, Visa, MasterCard, Discover and American Express.



Cards

**ICC (International Chamber of Commerce)**  
**INCOTERM 2010:**

**Delivery**

EX WORKS (EXAIR Corporation, 11510 Goldcoast Dr., Cincinnati, Ohio 45249, USA.)

All cataloged products are shipped from stock, via U.P.S. within 24 hours after receipt of order. Priority shipment is available upon request.

**Ordering:**

Call 1-800-903-9247 or +1-513-671-3322 Worldwide 8:00 a.m. to 5:00 p.m. ET (Mon. - Fri.)

Fax toll free 1-866-329-3924 or +1-513-671-3363 Worldwide

E-mail: [orders@exair.com](mailto:orders@exair.com)

[www.exair.com](http://www.exair.com) (secure web site)

**Remit to address (payments only):**

EXAIR Corporation Location 00766, Cincinnati, Ohio 45264-0766

**Tax:**

Sales and use tax, where applicable, are not included.

**Technical Assistance:**

Please call our Application Engineering Department, 1-800-90-EXAIR (1-800-903-9247), or e-mail at [techhelp@exair.com](mailto:techhelp@exair.com).



**Warranty:**

\* 5 Year Warranty applies to compressed air products only.  
A 1 Year Warranty applies to all accessories and electrically powered products.

5 Year "Built To Last" Warranty against defects in workmanship and materials on all compressed air products\*. Defective products must be returned freight prepaid for repair or replacement at our option. This warranty applies under conditions of normal use, but does not apply to defects that result from intentional damage, negligence, unreasonable use, wear or exposure.

**EXAIR's Unconditional Guarantee:**

Extends to all U.S. and Canadian customers and includes invoiced U.P.S. Ground Service shipping charges. Products returned after the 30 day guarantee period are subject to a 15% restocking charge. Products must be returned freight prepaid.



**Copyright Restrictions:**

The content of the EXAIR Catalog, including all photos, graphics, drawings and arrangements are proprietary to EXAIR Corporation and are protected by the United States and international copyright and trademark laws. You are authorized to use the contents of the EXAIR Catalog for personal use or as it relates to your role as a current or prospective customer of EXAIR. The contents of this catalog may not be copied or modified for any type of publication or distribution without the prior written consent of EXAIR Corporation. The content of the EXAIR Catalog is the intellectual property solely of the EXAIR Corporation with no rights transferred to other parties. No part of this catalog may be reproduced for any commercial purposes without the express authorization in writing by the EXAIR Corporation.

**Trademarks:**

"EXAIR.com", "EXAIR", "Cabinet Cooler", "E-Vac", "Intelligent Compressed Air", "VariBlast", "Gen4" and "Compressed Air Intelligence" are registered trademarks of the EXAIR Corporation. The EXAIR logo, product names, designs and descriptive phrases are trademarked by EXAIR Corporation. These trademarks may not be used without prior written permission of the EXAIR Corporation.

EXAIRLogger, EFC, Digital Flowmeter, Digital Sound Level Meter, High Power Cold Gun, Super Air Knife, Standard Air Knife, Full-Flow Air Knife, Air Cannon, Super Air Amplifier, Adjustable Air Amplifier, Super Air Nozzle, Micro Air Nozzle, High Power Safety Air Nozzle, Stay Set Hose, Soft Grip Super Air Scraper, Super Air Scraper, Super Blast Safety Gun, Super Air Wipe, Standard Air Wipe, Super Ion Air Knife, Standard Ion Air Knife, Super Ion Air Wipe, Ion Air Cannon, Ion Air Gun, Ion Air Jet, Ionizing Point, Stay Set Ion Air Jet, Line Vac, Chip Vac, Heavy Duty Dry Vac, Heavy Duty HEPA Vac, Reversible Drum Vac, High Lift Reversible Drum Vac, Chip Trapper, High Lift Chip Trapper, Vac-u-Gun, Deep Hole Vac-u-Gun, Air Disk, Air Stik, Mini Cooler, Cold Gun Aircoolant System, and ETC are trademarks of EXAIR Corporation.



11510 Goldcoast Dr.  
Cincinnati, Ohio 45249-1621  
**Phone Number:** (513) 671-3322  
**Fax Number:** (513) 671-3363  
**E-mail:** [techhelp@exair.com](mailto:techhelp@exair.com)  
**Web Site:** [www.exair.com](http://www.exair.com)



Intelligent Compressed Air® products are identified throughout this catalog that can help your plant save tens of thousands of dollars over the course of a single year. *The Best Practices for Compressed Air Systems* manual published by the Compressed

Air Challenge® recommends products like the Super Air Knife®, Super Air Amplifier®, and the family of Super Air Nozzles® for energy conservation. Many of the products shown offer unique ways to solve common industrial problems using compressed air. Compressed Air Challenge is a registered trademark of Compressed Air Challenge, Inc.



EXAIR has partnered with Energy Star, a voluntary program of the U.S. Department of Energy and the Environmental Protection Agency. Energy Star offers energy efficient solutions to help save money while protecting the environment for future generations. EXAIR has implemented improved energy management practices and technologies throughout our facility, including energy efficient lighting, HVAC systems, and electronic thermostats. EXAIR's participation in this program underscores our commitment to conserving energy.

EXAIR products are subject to ongoing development. Specifications are subject to change without notice.

Some products in this catalog are covered by U.S. Patent #5402938, #8153001, #8268179, and #9156045, and others may be U.S. Patent Pending.

Copyright ©2018 EXAIR Corporation. All Rights Reserved.



## Vortex Tubes

**Cold air to -50°F (-46°C) from your compressed air supply — with no moving parts!**



### What Is A Vortex Tube?

A low cost, reliable, maintenance free solution to a variety of industrial spot cooling problems. Using an ordinary supply of compressed air as a power source, vortex tubes create two streams of air, one hot and one cold, **with no moving parts.** Vortex tubes can produce:

- Temperatures from -50° to +260°F (-46° to +127°C)
- Flow rates from 1 to 150 SCFM (28 to 4,248 SLPM)
- Refrigeration up to 10,200 Btu/hr. (2,570 Kcal/hr.)


Temperatures, flows and cooling power are adjustable over a wide range using the control valve on the hot end exhaust.

### Why EXAIR Vortex Tubes?

EXAIR Vortex Tubes are constructed of **stainless steel**. The wear resistance of stainless steel, as well as its resistance to corrosion and oxidation, assures that EXAIR Vortex Tubes will provide years of reliable, maintenance-free operation.




A 1/4 ton of refrigeration in the palm of your hand!



A Model 3225 Vortex Tube keeps plastic dishwasher arms cool during ultrasonic welding.



Special high temperature vortex tubes keep a borscope lens cool while inserted into a 1200°F (650°C) boiler porthole.



A pair of medium vortex tubes cool a solenoid coil after a welding operation.


### Applications

- Cooling electronic controls
- Cooling machining operations
- Cooling CCTV cameras
- Setting hot melts
- Cooling soldered parts
- Cooling gas samples
- Electronic component cooling
- Cooling heat seals
- Cooling environmental chambers

### Advantages

- No moving parts
- No electricity or chemicals
- Small, lightweight
- Low cost
- Maintenance free
- Instant cold air
- Durable - stainless steel
- Adjustable temperature
- Interchangeable generators

## How A Vortex Tube Works

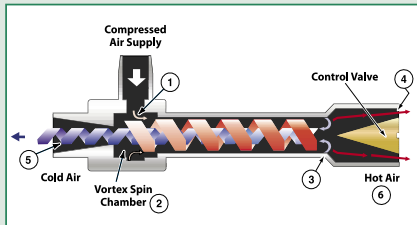


Compressed air, normally 80-100 PSIG (5.5 - 6.9 BAR), is ejected tangentially (1) through a generator into the **vortex spin chamber (2)**. At up to 1,000,000 RPM, this air stream revolves toward the hot end (3) where some escapes through the control valve (4). The remaining air, still spinning, is forced back through the center of this outer vortex. The inner stream gives off kinetic energy in the form of heat to the outer stream and exits the vortex tube as **cold air (5)**. The outer stream exits the opposite end as **hot air (6)**. There is a detailed discussion of vortex tube history and theory later on page 178 in this section.

## Controlling Temperature And Flow In A Vortex Tube


Cold airflow and temperature are easily controlled by adjusting the slotted valve in the hot air outlet. **Opening the valve reduces the cold airflow and the cold air temperature. Closing the valve increases the cold airflow and the cold air temperature.** The percentage of air directed to the cold outlet of the vortex tube is called the "cold fraction". In most applications, a cold fraction of 80% produces a combination of cold flow rate and temperature drop that maximizes refrigeration, or Btu/hr. (Kcal/hr.), output of a vortex tube. While low cold fractions (less than 50%) produce lowest temperatures, cold airflow volume is sacrificed to achieve them.

Most industrial applications, i.e., process cooling, part cooling, chamber cooling, require maximum refrigeration and utilize the 32XX series Vortex Tube. Certain "cryogenic" applications, i.e., cooling lab samples, circuit testing, are best served by the 34XX series Vortex Tube.

Setting a vortex tube is easy. Simply insert a thermometer in the cold air exhaust and set the temperature by adjusting the valve at the hot end. **Maximum refrigeration (80% cold fraction) is achieved when cold air temperature is 50°F (28°C) below compressed air temperature.**

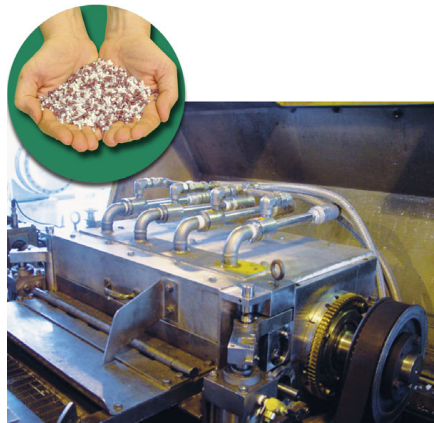

(4) Model 3250 Vortex Tubes cool the cutting knives in this pelletizer to prevent irregular shapes.



Model 3930 EXAIR Cooling Kit

If you are unsure of your flow and temperature requirements, EXAIR recommends the purchase of an **EXAIR Cooling Kit**. It contains a vortex tube, cold air muffler, air line filter and all generators required to experiment with the full range of airflows and temperatures.


# Vortex Tubes

## Selecting The Right Vortex Tube


EXAIR Vortex Tubes are available in three sizes. Each size can produce a number of flow rates, as determined by a small internal part called a **generator**. If Btu/hr. (Kcal/hr.) requirements, or flow and temperature requirements are known, simply select the appropriate vortex tube according to the specification information shown below or the performance charts shown on the following page. Keep in mind that the **vortex generators are interchangeable**. If, for example, a Model 3215 Vortex Tube does not provide sufficient cooling, you need only change generators within the vortex tube to upgrade the flow rate from 15 to 25, 30 or 40 SCFM (425 to 708, 850 or 1,133 SLPM). Generator part numbers are shown in the "Accessories" listing on page 179.

## Vortex Tube Dimensions


### Small




### With Mufflers




### Medium




### With Mufflers



### Large



### With Mufflers



## Vortex Tube Specifications

32XX series Vortex Tubes optimize temperature drop and airflow to **produce maximum cooling power or Btu/hr. (Kcal/hr.)**. Specify 32XX series Vortex Tubes for most general cooling applications.

34XX series Vortex Tubes provide **lowest cold air temperatures, but at low cold airflow (when less than a 50% cold fraction is used)**. Specify 34XX series Vortex Tubes only where temperatures below 0°F (-18°C) are desired.

32XX Series Vortex Tube Specifications

| Model | SCFM* | SLPM* | Btu/hr.** | Kcal/hr.** | SIZE   | dBA*** |
|-------|-------|-------|-----------|------------|--------|--------|
| 3202  | 2     | 57    | 135       | 34         | Small  | 68     |
| 3204  | 4     | 113   | 275       | 69         | Small  | 70     |
| 3208  | 8     | 227   | 550       | 139        | Small  | 76     |
| 3210  | 10    | 283   | 650       | 164        | Medium | 80     |
| 3215  | 15    | 425   | 1,000     | 252        | Medium | 81     |
| 3225  | 25    | 708   | 1,700     | 428        | Medium | 82     |
| 3230  | 30    | 850   | 2,000     | 504        | Medium | 84     |
| 3240  | 40    | 1,133 | 2,800     | 706        | Medium | 88     |
| 3250  | 50    | 1,416 | 3,400     | 857        | Large  | 94     |
| 3275  | 75    | 2,124 | 5,100     | 1,285      | Large  | 96     |
| 3298  | 100   | 2,832 | 6,800     | 1,714      | Large  | 96     |
| 3299  | 150   | 4,248 | 10,200    | 2,570      | Large  | 97     |

34XX Series Vortex Tube Specifications

| Model | SCFM* | SLPM* | Btu/hr.** | Kcal/hr.** | SIZE   | dBA*** |
|-------|-------|-------|-----------|------------|--------|--------|
| 3402  | 2     | 57    | -----     | -----      | Small  | 67     |
| 3404  | 4     | 113   | -----     | -----      | Small  | 69     |
| 3408  | 8     | 227   | -----     | -----      | Small  | 75     |
| 3410  | 10    | 283   | -----     | -----      | Medium | 78     |
| 3415  | 15    | 425   | -----     | -----      | Medium | 80     |
| 3425  | 25    | 708   | -----     | -----      | Medium | 82     |
| 3430  | 30    | 850   | -----     | -----      | Medium | 84     |
| 3440  | 40    | 1,133 | -----     | -----      | Medium | 87     |
| 3450  | 50    | 1,416 | -----     | -----      | Large  | 93     |
| 3475  | 75    | 2,124 | -----     | -----      | Large  | 96     |
| 3498  | 100   | 2,832 | -----     | -----      | Large  | 96     |
| 3499  | 150   | 4,248 | -----     | -----      | Large  | 96     |

\* SCFM (SLPM) at 100 PSIG (6.9 BAR) Inlet Pressure

\*\* Btu/hr. (Kcal/hr.) Cooling Capacity at 100 PSIG (6.9 BAR)

\*\*\* Noise levels taken with hot and cold mufflers installed.

\* SCFM (SLPM) at 100 PSIG (6.9 BAR) Inlet Pressure

\*\* Not Applicable. 34XX series Vortex Tubes are not normally used in air conditioning applications.

\*\*\* Noise levels taken with hot and cold mufflers installed.

## Vortex Tube Performance

The **Vortex Tube Performance Charts** below give approximate temperature drops (and rises) **from inlet air temperature** produced by a vortex tube set at each cold fraction. Assuming no fluctuation of inlet temperature or pressure, a vortex tube will reliably maintain temperature within  $\pm 1^\circ\text{F}$ .

| Pressure Supply | Cold Fraction % |     |     |     |     |     |     |
|-----------------|-----------------|-----|-----|-----|-----|-----|-----|
| PSIG            | 20              | 30  | 40  | 50  | 60  | 70  | 80  |
| 20              | 62              | 60  | 56  | 51  | 44  | 36  | 28  |
|                 | 15              | 25  | 36  | 50  | 64  | 83  | 107 |
| 40              | 88              | 85  | 80  | 73  | 63  | 52  | 38  |
|                 | 21              | 35  | 52  | 71  | 92  | 117 | 147 |
| 60              | 104             | 100 | 93  | 84  | 73  | 60  | 46  |
|                 | 24              | 40  | 59  | 80  | 104 | 132 | 166 |
| 80              | 115             | 110 | 102 | 92  | 80  | 66  | 50  |
|                 | 25              | 43  | 63  | 86  | 113 | 143 | 180 |
| 100             | 123             | 118 | 110 | 100 | 86  | 71  | 54  |
|                 | 26              | 45  | 67  | 90  | 119 | 151 | 191 |
| 120             | 129             | 124 | 116 | 104 | 91  | 74  | 55  |
|                 | 26              | 46  | 69  | 94  | 123 | 156 | 195 |

Numbers in shaded area give temperature drop of cold air,  $^\circ\text{F}$ .  
Numbers in white area give temperature rise of hot air,  $^\circ\text{F}$ .

| Pressure Supply | Cold Fraction % (METRIC) |      |      |      |      |      |       |
|-----------------|--------------------------|------|------|------|------|------|-------|
| BAR             | 20                       | 30   | 40   | 50   | 60   | 70   | 80    |
| 1.4             | 34.4                     | 33.3 | 31.1 | 28.3 | 24.4 | 20.0 | 15.6  |
|                 | 8.3                      | 13.9 | 20.0 | 28.3 | 35.6 | 46.1 | 59.4  |
| 2               | 40.9                     | 39.6 | 37.1 | 33.8 | 29.2 | 24.0 | 18.1  |
|                 | 9.8                      | 16.4 | 24.0 | 33.3 | 42.6 | 54.6 | 69.5  |
| 3               | 50.4                     | 48.7 | 45.7 | 41.6 | 36.0 | 29.7 | 21.9  |
|                 | 12.0                     | 19.9 | 29.6 | 40.3 | 52.3 | 66.5 | 83.5  |
| 4               | 56.9                     | 54.7 | 50.9 | 46.1 | 40.0 | 32.9 | 25.1  |
|                 | 13.2                     | 21.9 | 32.4 | 43.9 | 57.1 | 72.5 | 91.2  |
| 5               | 61.6                     | 59.0 | 54.8 | 49.4 | 43.0 | 35.4 | 26.9  |
|                 | 13.7                     | 23.3 | 34.2 | 46.5 | 60.9 | 77.2 | 97.1  |
| 6               | 65.4                     | 62.7 | 58.2 | 52.7 | 45.6 | 37.6 | 28.6  |
|                 | 14.1                     | 24.3 | 35.8 | 48.6 | 63.9 | 81.0 | 102.1 |
| 7               | 68.6                     | 65.8 | 61.4 | 55.7 | 48.0 | 39.6 | 30.0  |
|                 | 14.4                     | 25.1 | 37.3 | 50.2 | 66.3 | 84.2 | 106.3 |
| 8               | 71.1                     | 68.2 | 63.8 | 57.3 | 50.0 | 40.8 | 30.4  |
|                 | 14.4                     | 25.4 | 38.1 | 51.8 | 67.9 | 86.1 | 107.9 |

Numbers in shaded area give temperature drop of cold air,  $^\circ\text{C}$ .  
Numbers in white area give temperature rise of hot air,  $^\circ\text{C}$ .

**Back Pressure:** The performance of a vortex tube deteriorates with back pressure on the cold air exhaust. Low back pressure, up to 2 PSIG (.1 BAR), will not change performance. 5 PSIG (.3 BAR) will change performance by approximately  $5^\circ\text{F}$  ( $2.8^\circ\text{C}$ ).

**Filtration:** The use of clean air is essential, and filtration of 25 microns or less is recommended. EXAIR filters contain a 5 micron element and are properly sized for flow.

**Inlet Air Temperature:** A vortex tube provides a temperature drop from supply air temperature (see *Performance Charts above*). Elevated inlet temperatures will produce a corresponding rise in cold air temperatures.

**Noise Muffling:** EXAIR offers mufflers for both the hot and cold air discharge. Normally, muffling is not required if the cold air is ducted.

**Regulation:** For best performance, use line pressures of 80 to 110 PSIG (5.5 to 7.6 BAR). Maximum pressure rating is 250 PSIG (17.2 BAR), minimum 20 PSIG (1.4 BAR).

## EXAIR Products Using Vortex Tubes

Over the years, the basic vortex tube has been used in virtually hundreds of industrial cooling applications. A few have become so popular as to warrant the development

of an “applied product” designed to suit the specific application. These products include the Adjustable Spot Cooler, Mini Cooler, Cold Gun and Cabinet Coolers that can be found in this catalog.



## High Temperatures


High temperature vortex tubes for ambient temperatures above  $200^\circ\text{F}$  ( $93^\circ\text{C}$ ) are available. Standard vortex tubes are for ambient temperatures up to  $125^\circ\text{F}$  ( $52^\circ\text{C}$ ). Contact an Application Engineer at 1-800-903-9247 for details.

## Preset Vortex Tubes

EXAIR can provide vortex tubes preset to any combination of flow and temperature desired. To prevent tampering with the desired setting, a drilled orifice that replaces the adjustable hot valve is available. For more information, please contact an Application Engineer.

# Vortex Tubes

## Cooling Vacuum Formed Parts

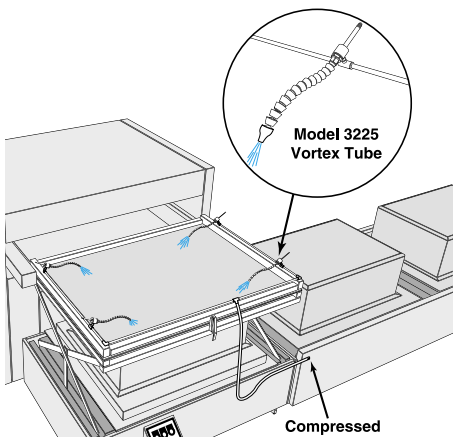

**The Problem:** A manufacturer of major appliances vacuum forms the plastic interior shell of refrigerators. The deep draw of the plastic and complex geometry left the four corners unacceptably thin. The corners would tear during assembly or bulge when insulation was inserted between the shell and exterior housing, resulting in a high rejection rate.

**The Solution:** (4) **Model 3225 Vortex Tubes** were positioned to cool the critical corner areas just prior to forming the plastic sheet. By cooling these areas, less stretching of the plastic occurred which resulted in thicker corners.

**Comment:** Rejected parts become very costly, especially when expensive materials and slow process times are involved. The cold air from the vortex tube is just the solution for big problems like this one. It can supply "instant" cold air down to -50°F (-46°C) from an ordinary compressed air supply. Along with cooling other vacuum formed parts such as spas, bathtubs, tote pans and waste cans, it is ideal for cooling hot melts, ultrasonic welders, environmental chambers, etc.


This is an ideal application for EXAIR's EFC, an electronic flow control for compressed air, shown on page 7. It reduces air consumption by turning on the compressed air for a preset length of time, when sensing the plastic sheet is in position.

## Cooling An Ultrasonic Weld


**The Problem:** A manufacturer of toothpaste seals the ends of plastic tubes with an ultrasonic welder prior to filling. As heat built up at the sealing jaw of the welder, release of the tubes was delayed. Tubes that were too hot would not seal resulting in a high rate of rejection.

**The Solution:** A **Model 3215 Vortex Tube** was used to direct cold air at the jaw of the welder. The cooling was transferred through the metal jaw to the tube seam while in the clamped position. **Process time was reduced and rejected tubes were eliminated.**

**Comment:** It amazes most people that the cooling from a small vortex tube can dramatically improve quality and throughput. The vortex tube is the low cost solution for cooling parts, chambers, heat seals and various processes. They're easy to use, can be adjusted to produce cold air down to -50°F (-46°C) and have no moving parts to wear out.

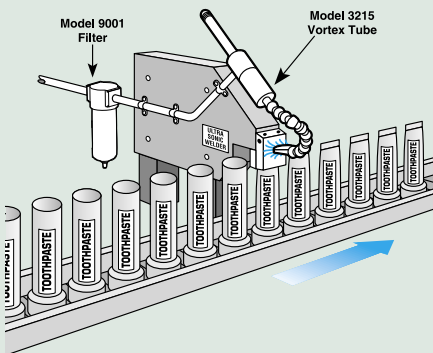

## Cooling Blow Molded Fuel Tanks

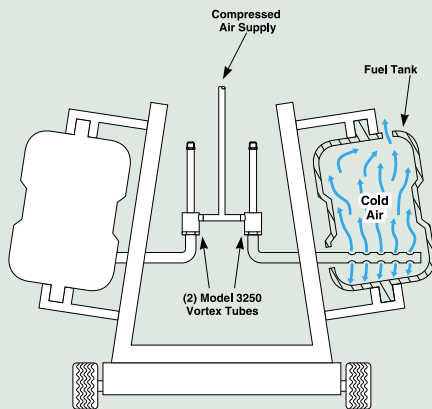


**The Problem:** Automobile fuel tanks are blow molded, then clamped to a fixture to prevent distortion during the cooling cycle. The cooling time of over 3 minutes required for each tank created a bottleneck in the production process.

**The Solution:** (2) Model 3250 Vortex Tubes were mounted to the cooling rack and connected to a compressed air line. Cold air produced by the vortex tubes was circulated inside the fuel tanks. **Cooling time was reduced from three minutes to two minutes for each tank, improving productivity by 33%.**

**Comment:** It's hard to imagine an application better suited to vortex cooling than this one. The vortex tubes' small size and light weight simplified mounting to the cooling rack. No moving parts assured reliability and maintenance-free operation in a hostile environment. Finally, the cold airstream was easily channeled to the fuel tank via the threaded cold air outlet. When the cooling problem includes the need for simplicity, reliability and compact design, a vortex tube is very often the best choice.

## Cooling Small Parts After Brazing

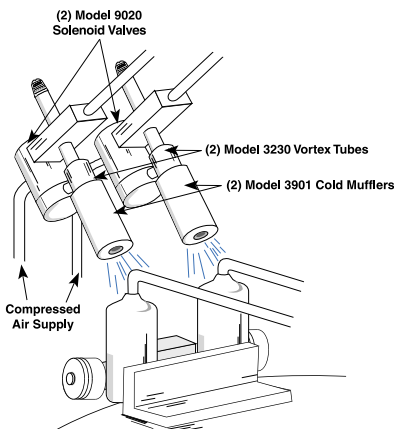


**The Problem:** Air conditioner parts assembled on an automatic brazing machine must be cooled to handling temperature prior to removal. The machine was capable of brazing up to four hundred pieces per hour. However, the time required for the parts to cool severely limited the production rate. Water cooling was unacceptable from the standpoint of both housekeeping and part contamination.

**The Solution:** (2) Model 3230 Vortex Tubes (with cold air mufflers installed) were used to blow cold air on the parts after the brazing cycle. The vortex tubes were set at an 80% cold airflow (cold fraction) to produce maximum refrigeration. **The parts were cooled from a brazing temperature of 1,450°F (788°C) to a handling temperature of 120°F (49°C) within 20 seconds, allowing the machine to operate at its maximum production rate.**

**Comment:** Compared to conventional refrigeration or water cooling, vortex tubes offer a number of advantages: low cost, compact design, inherent reliability and cleanliness. These attributes make vortex tubes the cost effective choice for many small part cooling operations.

# Vortex Tubes

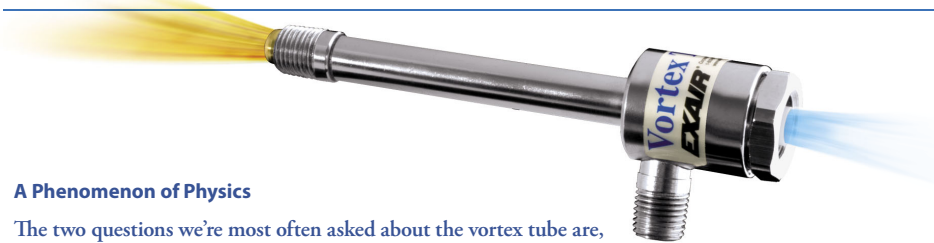

## A Phenomenon of Physics

The two questions we're most often asked about the vortex tube are, "How long has it been around?" and "How does the thing work?"

Following is a brief history and theory of the vortex tube.

The vortex tube was invented quite by accident in 1928. George Ranque, a French physics student, was experimenting with a vortex-type pump he had developed when he noticed warm air exhausting from one end, and cold air from the other. Ranque soon forgot about his pump and started a small firm to exploit the commercial potential for this strange device that produced hot and cold air with no moving parts. However, it soon failed and the vortex tube slipped into obscurity until 1945 when Rudolph Hilsch, a German physicist, published a widely read scientific paper on the device.

Much earlier, the great nineteenth century physicist, James Clerk Maxwell, postulated that since heat involves the movement of molecules, we might someday be able to get hot and cold air from the same device with the help of a "friendly little demon" who would sort out and separate the hot and cold molecules of air.

Thus, the vortex tube has been variously known as the "*Ranque Vortex Tube*", the "*Hilsch Tube*", the "*Ranque-Hilsch Tube*", and "*Maxwell's Demon*". By any name, it has in recent years gained acceptance as a simple, reliable and low cost answer to a wide variety of industrial spot cooling problems.

**A vortex tube uses compressed air as a power source, has no moving parts, and produces hot air from one end and cold air from the other. The volume and temperature of these two airstreams are adjustable with a valve built into the hot air exhaust. Temperatures as low as -50°F (-46°C) and as high as 260°F (127°C) are possible.**

## Theories abound regarding the dynamics of a vortex tube.

Here is one widely accepted explanation of the phenomenon:

Compressed air is supplied to the vortex tube and passes through nozzles that are tangent to an internal counterbore. These nozzles set the air in a vortex motion. This spinning stream of air turns 90° and passes down the hot tube in the form of a spinning shell, similar to a tornado. A valve at one end of the tube allows some of the warmed air to escape. What does not escape, heads back down the tube as a second vortex inside the low-pressure area of the larger vortex. This inner vortex loses heat and exhausts through the other end as cold air.

While one airstream moves up the tube and the other down it, both rotate in the same direction at the same angular velocity. That is, a particle in the inner stream completes one rotation in the same amount of time as a particle in the outer stream. However, because of the principle of conservation of angular momentum, the rotational speed of the smaller vortex might be expected to increase. (The conservation principle is demonstrated by spinning skaters who can slow or speed up their spin by extending or drawing in their arms.) But in the vortex tube, the speed of the inner vortex remains the same. Angular momentum has been lost from the inner vortex. The energy that is lost shows up as heat in the outer vortex. Thus the outer vortex becomes warm, and the inner vortex is cooled.

## EXAIR Cooling Kits

EXAIR Cooling Kits include a vortex tube, all generators, cold muffler, fitting, tubing and clips to duct cold air, and filter separator.

| Model # | Description                                                   |
|---------|---------------------------------------------------------------|
| 3908    | Cooling Kit up to 550 Btu/hr. (139 Kcal/hr.), Small Size      |
| 3930    | Cooling Kit up to 2,800 Btu/hr. (706 Kcal/hr.), Medium Size   |
| 3998    | Cooling Kit up to 10,200 Btu/hr. (2,570 Kcal/hr.), Large Size |

## Vortex Tubes

| Model # | Description                                                                                             |
|---------|---------------------------------------------------------------------------------------------------------|
| 3202    | Vortex Tube, 2 SCFM (57 SLPM), for max. refrigeration, 135 Btu/hr. (34 Kcal/hr.), Small Size            |
| 3204    | Vortex Tube, 4 SCFM (113 SLPM), for max. refrigeration, 275 Btu/hr. (69 Kcal/hr.), Small Size           |
| 3208    | Vortex Tube, 8 SCFM (227 SLPM), for max. refrigeration, 550 Btu/hr. (139 Kcal/hr.), Small Size          |
| 3210    | Vortex Tube, 10 SCFM (283 SLPM), for max. refrigeration, 650 Btu/hr. (164 Kcal/hr.), Medium Size        |
| 3215    | Vortex Tube, 15 SCFM (425 SLPM), for max. refrigeration, 1,000 Btu/hr. (252 Kcal/hr.), Medium Size      |
| 3225    | Vortex Tube, 25 SCFM (708 SLPM), for max. refrigeration, 1,700 Btu/hr. (428 Kcal/hr.), Medium Size      |
| 3230    | Vortex Tube, 30 SCFM (850 SLPM), for max. refrigeration, 2,000 Btu/hr. (504 Kcal/hr.), Medium Size      |
| 3240    | Vortex Tube, 40 SCFM (1,133 SLPM), for max. refrigeration, 2,800 Btu/hr. (706 Kcal/hr.), Medium Size    |
| 3250    | Vortex Tube, 50 SCFM (1,416 SLPM), for max. refrigeration, 3,400 Btu/hr. (857 Kcal/hr.), Large Size     |
| 3275    | Vortex Tube, 75 SCFM (2,124 SLPM), for max. refrigeration, 5,100 Btu/hr. (1,285 Kcal/hr.), Large Size   |
| 3298    | Vortex Tube, 100 SCFM (2,832 SLPM), for max. refrigeration, 6,800 Btu/hr. (1,714 Kcal/hr.), Large Size  |
| 3299    | Vortex Tube, 150 SCFM (4,248 SLPM), for max. refrigeration, 10,200 Btu/hr. (2,570 Kcal/hr.), Large Size |
| 3402    | Vortex Tube, 2 SCFM (57 SLPM), for max. cold temperature, Small Size                                    |
| 3404    | Vortex Tube, 4 SCFM (113 SLPM), for max. cold temperature, Small Size                                   |
| 3408    | Vortex Tube, 8 SCFM (227 SLPM), for max. cold temperature, Small Size                                   |
| 3410    | Vortex Tube, 10 SCFM (283 SLPM), for max. cold temperature, Medium Size                                 |
| 3415    | Vortex Tube, 15 SCFM (425 SLPM), for max. cold temperature, Medium Size                                 |
| 3425    | Vortex Tube, 25 SCFM (708 SLPM), for max. cold temperature, Medium Size                                 |
| 3430    | Vortex Tube, 30 SCFM (850 SLPM), for max. cold temperature, Medium Size                                 |
| 3440    | Vortex Tube, 40 SCFM (1,133 SLPM), for max. cold temperature, Medium Size                               |
| 3450    | Vortex Tube, 50 SCFM (1,416 SLPM), for max. cold temperature, Large Size                                |
| 3475    | Vortex Tube, 75 SCFM (2,124 SLPM), for max. cold temperature, Large Size                                |
| 3498    | Vortex Tube, 100 SCFM (2,832 SLPM), for max. cold temperature, Large Size                               |
| 3499    | Vortex Tube, 150 SCFM (4,248 SLPM), for max. cold temperature, Large Size                               |

## Vortex Tube Accessories and Components

| Model # | Description                                                                        |
|---------|------------------------------------------------------------------------------------|
| 3905    | Cold Muffler for 2 through 8 SCFM (57-227 SLPM) Vortex Tube, Small Size            |
| 3901    | Cold Muffler for 10 through 40 SCFM (283-1,133 SLPM) Vortex Tube, Medium Size      |
| 3906    | Cold Muffler for 50 through 150 SCFM (1,416-4,248 SLPM) Vortex Tube, Large Size    |
| 3903    | Hot Muffler for 2 through 40 SCFM (57-1,133 SLPM) Vortex Tube, Small & Medium Size |
| 3907    | Hot Muffler for 50 through 150 SCFM (1,416-4,248 SLPM) Vortex Tube, Large Size     |
| 3909    | Generator Kit for 2 through 8 SCFM (57-227 SLPM) Vortex Tube, Small Size           |
| 3902    | Generator Kit for 10 through 40 SCFM (283-1,133 SLPM) Vortex Tube, Medium Size     |
| 3910    | Generator Kit for 50 through 150 SCFM (1,416-4,248 SLPM) Vortex Tube, Large Size   |

Generator Kits ordered with a vortex tube include all generators for the specified tube. Permits setting the vortex tube for all capacities and styles.

**Generator Only** — Specify capacity (SCFM) and style ("R" for max. refrigeration, "C" for max. cold temperature).

**Example:**

15-R = 15 SCFM Generator for max. refrigeration

50-C = 50 SCFM Generator for max. cold temperature

## Accessories

| Model # | Description                                                            |
|---------|------------------------------------------------------------------------|
| 9001    | Automatic Drain Filter Separator, 3/8 NPT, 65 SCFM (1,841 SLPM)        |
| 9032    | Automatic Drain Filter Separator, 1/2 NPT, 90 SCFM (2,549 SLPM)        |
| 9002    | Automatic Drain Filter Separator, 3/4 NPT, 220 SCFM (6,230 SLPM)       |
| 9005    | Oil Removal Filter, 3/8 NPT, 15-37 SCFM (425-1,048 SLPM)               |
| 9006    | Oil Removal Filter, 3/4 NPT, 50-150 SCFM (1,416-4,248 SLPM)            |
| 9015    | Valve and Thermostat Kit, 120V, 50/60Hz, 1/4 NPT, 40 SCFM (1,133 SLPM) |

Other solenoid valves and thermostats available. Contact factory.

**Note:** Flow ratings shown (SCFM/SLPM) assume 100 PSIG (6.9 BAR) inlet pressure. At other pressures, flow is proportional to absolute inlet pressure.



**GO GREEN**



**SAVE MONEY**

**Order EXAIR's EFC™**  
 electronic flow control to  
 minimize compressed air use.  
 See page 7 for details.



**Order Direct**  
**We Ship From Stock**  
[www.exair.com](http://www.exair.com) [techhelp@exair.com](mailto:techhelp@exair.com)

## Adjustable Spot Cooler

**Cold air to -30°F (-34°C) from  
your compressed air supply for  
spot cooling!**

### What Is The Adjustable Spot Cooler?

A low cost, reliable, maintenance free solution to a variety of industrial spot cooling problems. With the turn of a knob, you can select the temperature best suited to your application. **The Adjustable Spot Cooler provides a precise temperature setting from -30°F (-34°C) to room temperature.**

The Adjustable Spot Cooler incorporates a vortex tube that converts an ordinary supply of compressed air into cold air.

- It can produce temperatures from -30° to +70°F (-34° to +21°C)
- Parts included for flow rates of 15, 25, and 30 SCFM (425, 708 and 850 SLPM). 25 SCFM (708 SLPM) generator is factory installed.
- It can produce refrigeration up to 2,000 Btu/hr. (504 Kcal/hr.)

A swivel magnetic base provides easy mounting and portability. Flexible tubing that holds its position directs the cold air. No moving parts or CFC's assures maintenance free operation.

### Why The Adjustable Spot Cooler?

The Adjustable Spot Cooler is quiet (less than 75 dBA), easily set with a thermometer and holds the temperature setting. It's ideal for applications where mist or liquid cooling can not be used due to part contamination or cost. Tolerances, product finish and production rates can improve dramatically.

The Adjustable Spot Cooler is available with either a single point or dual point hose kit. The single point system (Model 3825) is recommended for cooling a small surface like solder joints, hot melts or drilled plastics. The dual point system (Model 3925) is recommended when heat is generated over a larger surface area.



PVC hose is cooled at the exit of an extruder so it can be coiled immediately.



The Adjustable Spot Cooler replaces flood coolant and eliminates hours of cleanup on a cast iron machining operation.



The Adjustable Spot Cooler maintains critical tolerances on machined plastic parts.


### Applications

- Adjusting thermostats
- Cooling solder
- Cooling machined plastics
- Setting hot melts
- Cooling welding horns
- Cooling molded plastics
- Electronic component cooling
- Cooling gas samples
- Cooling environmental chambers

### Advantages

- No moving parts
- No electricity or chemicals
- Small, lightweight
- Low cost
- Maintenance free
- Instant cold air
- Quiet - less than 75 dBA
- Swivel magnetic base
- Interchangeable generators

## How The Adjustable Spot Cooler Works

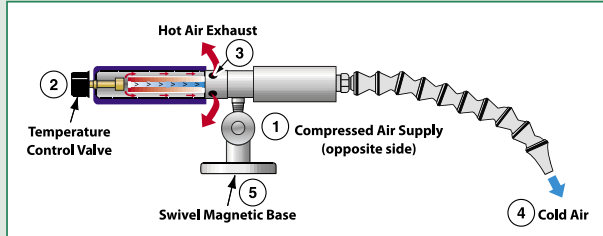

The Adjustable Spot Cooler incorporates a vortex tube to convert an ordinary supply of compressed air (1) into two low pressure streams, one hot and one cold. (For complete information on vortex tube operation, see page 175.) With the turn of a knob, the **temperature control valve** (2) allows some hot air to flow through a muffling sleeve and out the **hot air exhaust** (3). The opposite end provides a cold airstream (4) that is muffled and discharged through the flexible hose, which directs it to the point of use. The **swivel magnetic base** (5) provides easy mounting and portability.


## Specifications

| Pressure Supply |     | Air Consumption |      | Sound Level |
|-----------------|-----|-----------------|------|-------------|
| PSIG            | BAR | SCFM            | SLPM | dBA         |
| 100             | 6.9 | 15              | 425  | 72          |
| 100             | 6.9 | 25*             | 708  | 73          |
| 100             | 6.9 | 30              | 850  | 74          |

\* 25 SCFM (708 SLPM) generator is factory installed.  
Air consumption is based on generator installed.




The Model 3825 Adjustable Spot Cooler can produce temperatures from -30° to +70°F (-34° to +21°C).



Electronic components stay cool during a soldering operation.

## Dimensions

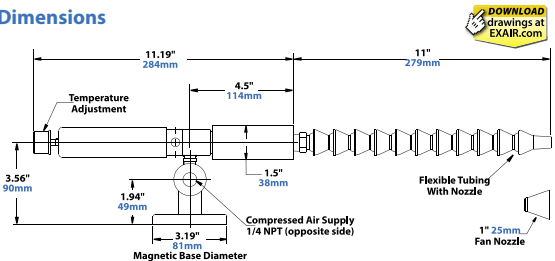

DOWNLOAD  
drawings at  
EXAIR.com

## Adjusting the Spot Cooler

The Adjustable Spot Cooler System can produce a full range of airflow and temperatures as determined by the knob setting and a small internal part called a generator. The generators control the SCFM (SLPM) of air consumption and are easily interchangeable.


The Adjustable Spot Cooler has a 25 SCFM (708 SLPM) generator installed that produces up to 1,700 Btu/hr. (429 Kcal/hr.). If less cooling is desired, the 15 SCFM (425 SLPM) generator which delivers 1,000 Btu/hr. (252 Kcal/hr.) can be installed. If more cooling is needed, the 30 SCFM (850 SLPM) generator can be installed for up to 2,000 Btu/hr. (504 Kcal/hr.).

## Controlling the Cold Air

The Adjustable Spot Cooler gives instant cold air when filtered compressed air is supplied to it. Cycling on and off is a good way to save air. For on and off control, use a Model 9012 Manual Shutoff Valve. To turn the Adjustable Spot Cooler on with the machine, the Model 9020 Solenoid Valve may be used and wired through the machine control switch. The EFC electronic flow control shown on page 7 can also be used.

# Adjustable Spot Cooler

## Testing Heat Tape Thermostats

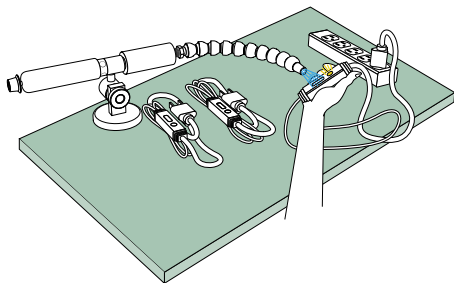

**The Problem:** A manufacturer of electrical heat tapes had a problem testing thermostats for accuracy. The heat tape is supposed to switch on when the outdoor temperature dips below 40°F to prevent pipes from freezing or ice from building up on a roof's edge. The liquid-tight thermostat of every tape had to be dipped into a bowl of ice water (thermometer checked at 36°F (2°C)) to make sure the indicator light

came on and the tape got warm. Summertime heat caused the water to heat up so quickly that more time was spent regulating the water temperature than testing thermostats.

**The Solution:** The water bath was replaced with a **Model 3825 Adjustable Spot Cooler**. Once set to their desired temperature of 36°F (2°C), it provided a stable temperature all day long without adjustment. Drying each heat tape was no longer required and testing was over in seconds.

**Comment:** The Adjustable Spot Cooler paid for itself in no time as a result of the increased productivity. In this case, **the company used the included 15 SCFM (425 SLPM) generator which minimized the compressed air use, costing only 23 cents per hour of continuous use!** When testing thermostats, cooling machined plastics, setting hot melts or controlling tolerances, the Adjustable Spot Cooler is the best choice.

## Adjustable Spot Cooler Systems



### Model 3825 Adjustable Spot Cooler System

includes the Adjustable Spot Cooler, single point hose kit with cone and fan nozzle, swivel magnetic base, filter separator, 15 and 30 SCFM (425 and 850 SLPM) generators. (25 SCFM/708 SLPM generator installed.)



### Model 3925 Adjustable Spot Cooler System

includes the Adjustable Spot Cooler, dual point hose kit with cone and fan nozzles, swivel magnetic base, filter separator, 15 and 30 SCFM (425 and 850 SLPM) generators. (25 SCFM/708 SLPM generator installed.)

(Adjustable Spot Cooler with dual point hose kit is recommended when heat is generated over a larger surface area.)

#### Accessories and Components

| Model # | Description                                                                              |
|---------|------------------------------------------------------------------------------------------|
| 5901    | Single Point Hose Kit (Included with 3825)                                               |
| 5902    | Dual Point Hose Kit (Included with 3925)                                                 |
| 9004    | Auto Drain Filter Separator, 1/4 NPT, 43 SCFM (1,359 SLPM) (Included with 3825 and 3925) |
| 9005    | Oil Removal Filter, 3/8 NPT, 15-37 SCFM (425-1,048 SLPM)                                 |
| 9012    | Manual Shutoff Valve, 1/4 NPT                                                            |
| 9020    | Solenoid Valve, 120V, 50/60Hz, 1/4 NPT, 40 SCFM (1,133 SLPM)                             |



Order EXAIR's EFC™ electronic flow control to minimize compressed air use. See page 7 for details.





## Mini Cooler

An INTELLIGENT  
COMPRESSED AIR®  
Product

## Mini Cooler™

Cool small parts and tools  
with clean, cold air!

Prevent burning, melting  
or breakage!

### What Is The Mini Cooler?

A proven way to reduce downtime and increase productivity on a variety of operations involving small parts where heat is a problem. EXAIR's Mini Cooler produces a stream of 20°F (-7°C) cold air to prevent heat build-up. **The Mini Cooler is particularly effective on high speed operations to prevent burning, melting and heat related breakage.** Operation is quiet (76 dBA) and there are no moving parts to wear out.



### Applications

- Small tool cooling
- Needle cooling
- Blade cooling
- Lens grinding

### Advantages

- Low cost
- Increases production rates
- Improves tolerances
- Quiet, compact

### Mini Cooler Systems



**Model 3808**  
**Mini Cooler System**  
(one cold outlet)

Includes Mini Cooler, Single Point Hose Kit, Swivel Magnetic Base and Manual Drain Filter Separator with Mounting Bracket.



**Model 3308**  
**Mini Cooler System**  
(two cold outlets)

includes Mini Cooler, Dual Point Hose Kit, Swivel Magnetic Base and Manual Drain Filter Separator with Mounting Bracket.

### Mini Cooler

| Model #     | Description                                                                                                                                                   |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>3808</b> | Mini Cooler System (one cold outlet) includes the Mini Cooler, swivel magnetic base, mini single point hose kit and manual drain filter with mounting bracket |
| <b>3308</b> | Mini Cooler System (two cold outlets) includes the Mini Cooler, swivel magnetic base, mini dual point hose kit and manual drain filter with mounting bracket  |




The Mini Cooler is an excellent spot cooler to prevent burning or breakage.

### Mini Cooler Specifications

| Air Consumption |      | Temperature Out |    | Sound @ 3' (914mm) |         |
|-----------------|------|-----------------|----|--------------------|---------|
| SCFM            | SLPM | °F              | °C | dBA                | INLET   |
| 8               | 227  | 20              | -7 | 76                 | 1/4 NPT |


Supply air at 100 PSIG (6.9 BAR) & 70°F (21°C)

### How The Mini Cooler Works

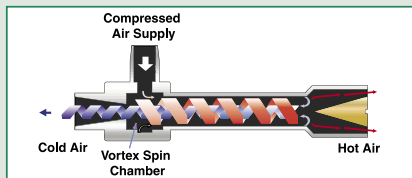

The Mini Cooler incorporates a vortex tube to convert a small amount of compressed air into two low pressure streams, one moving within the other in opposite directions (see page 173). The two airstreams exchange heat, producing cold air from one end of the tube and hot air from the other. A flexible hose directs the cold airstream at the surface to be cooled.

### Dimensions

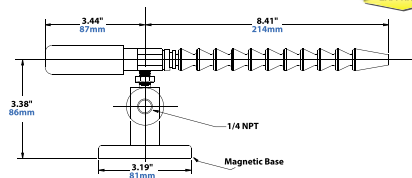

### Accessories

| Model #     | Description                                                          |
|-------------|----------------------------------------------------------------------|
| <b>5904</b> | Mini Cooler Single Point Hose Kit (Included with 3808)               |
| <b>5905</b> | Mini Cooler Dual Point Hose Kit (Included with 3308)                 |
| <b>9003</b> | Manual Drain Filter Separator, 1/4 NPT (Included with 3808 and 3308) |
| <b>9012</b> | Manual Shutoff Valve, 1/4 NPT                                        |
| <b>9027</b> | Oil Removal Filter, 1/4 NPT, 24 SCFM (680 SLPM)                      |

# EXAIR® Standards Compliance

As the leader in standards compliance, EXAIR's products come with more than engineered performance, peak efficiency, the best technical knowledge and unmatched customer service...

EXAIR is dedicated to providing products that have been manufactured to meet the strict requirements of the following standards. These standards provide confidence that you are receiving reliable, high quality products which will perform as stated within the performance charts provided.

Our products meet or exceed the strict safety standards of OSHA and the European Union to ensure the safety of your personnel. Many of these standards will allow your products a smoother transaction when selling your products into international markets.

#### OSHA and CE Compliance:



EXAIR compressed air products comply with OSHA's Safety Requirements (29 CFR 1910.242(b)), the EU General Product Safety Directive (2001/95/EC) and meet the noise limitation requirements (29 CFR-1910.95(a)), of the EU Machinery Directive (2006/42/EC). EXAIR's Electronic Flow Control and Electronic Temperature Control meet the low voltage standards of the EU Low Voltage Directive (2006/95/EC). Some EXAIR products display the CE mark where there are applicable directives. All sound level measurements are taken at 3 feet from product.

#### RoHS:



Electrical portions of EXAIR's Static Eliminators, EFC, ETC, Digital Flowmeter solenoid valves, and thermostats comply with the RoHS (Restriction of Hazardous Substances) Directive 2011/65/EU, including the amendment outlined in the European Commission decision L 214/65.

#### Conflict Mineral Free:



Look for this symbol to designate conflict mineral free products throughout our catalog. EXAIR supports Section 1502 of the Dodd-Frank Wall Street Reform and Consumer Protection Act. We are committed to compliance with the conflict minerals rule in order to curb the illicit trade of tin, tantalum, tungsten and gold in the DRC region. EXAIR is using the CMRT 4.20 template to document our supply chain and commitment to conflict free products.

#### Reach:



Per Regulation (EC) No 1907/2006 Title I, Article 3, paragraph 3, the European Union has recently enacted legislation to register chemicals and substances imported into the EU to ensure a high level of protection of human health and the environment.

Per Title II, Article 7, paragraph 1, articles (products) must be registered when a substance is intended to be released under normal or reasonably foreseeable conditions of use and it is present in those articles in quantities totaling over 1 metric ton per producer or importer per year. Registration of EXAIR products is not required since they do not contain substances that are intentionally released.